



SENSOR PATCH

Moisture Level Sensing Inlay

SMARTRAC's state-of-the-art SENSOR PATCH broadens the company's inlay and tag product range for passive sensor inlays. It is specially designed to measure moisture conditions in medical care areas, e.g. geriatric care, long-term medical care and childcare.

The SMARTRAC SENSOR PATCH is a passive UHF inlay equipped with RFMicron's Magnus®S2 IC. This RFID sensor inlay offers great performance, and accurately detects urine levels in the diaper. The specific antenna design acts as a resistor/inductor/capacitor (RLC) tuned circuit to enable an antenna to sense its environment. The antenna converts environmental data into an impedance change, and then the sensor tag IC translates this into a sensor code, as it dynamically matches antenna impedance to die impedance. The sensing information is digitized and wirelessly communicated to off-the-shelf readers using a standard UHF Gen 2 protocol READ command for further processing by caregivers.

The innovative SENSOR PATCH is a disposable, UHF, single-chip sensor inlay solution that offers cost efficiency, is easy to implement, and works on different textiles, pulps and nonwoven materials. The inlay is attached outside of the diaper to avoid skin irritation. In industrial diaper production, the inlay can be placed between the diaper's layers to remain invisible to end users.

It is deployable where active or semi-active sensors are not practical, and involves no battery maintenance, costs or problems with product lifetime or recycling. Delivery formats are dry and wet to suit all converting-industry needs, and the inlay complies with all relevant industry standards and strict quality control parameters.

Overview

Operating Frequency
860 - 960 MHz (ETSI)

Integrated Circuit (IC)
RFMicron Magnus®S2

Antenna Size
102 × 8.62 mm /
4.0 × 0.4 in

Die-cut Size
105 × 11.62mm /
4.1 × 0.5 in

International Standards

▶ EPC Class 1 Gen 2
v.2.0.0 ISO 18000-6C

Application Areas


- ▶ Geriatric care
- ▶ Medical long-term care
- ▶ Childcare

SENSOR PATCH


Moisture Level Sensing Inlay

| Technical Features | | | |
|---|---|---------------|--------------------|
| IC + Memory RFMicron Magnus [®] S2 128 bit EPC + 144 bit user memory | Size | Format | Sales Code |
| | 102 × 8.62 mm / 4.0 × 0.4 in 105 × 11.62 mm / 4.1 × 0.5 in | Dry Wet | 3005422 3005424 |
| Frequency | 860-960 MHz (ETSI band) | | |
| Antenna Size | 102 × 8.62 mm / 4.0 × 0.4 in | | |
| Die-Cut Size | 105 × 11.62 mm / 4.1 × 0.5 in | | |
| Web Width | 110 mm / 4.3 in | | |
| Operating Temperature | -40 °C to +85 °C / -40 °F to +185 °F | | |
| Adhesive | RA-2 | | |
| Qty/Reel | 2.000 pcs | | |
| Core Size | 76 mm / 3 in | | |
| Shelf Life | +20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing | | |

Read Range in Plastic (m)

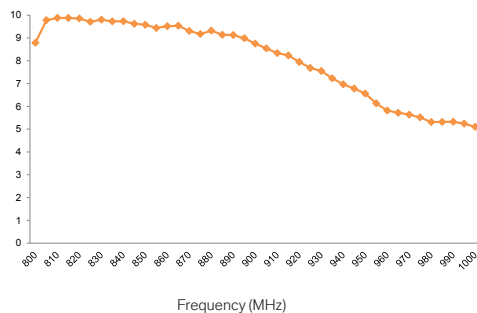

Sensor Patch Frequency vs. Sensor Code Value

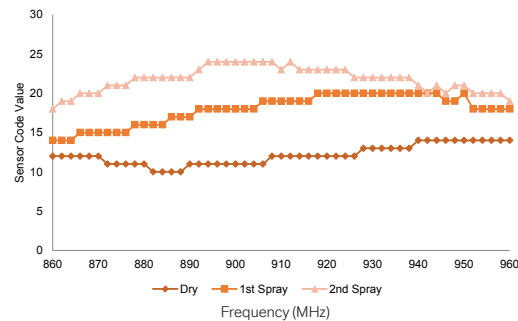

All the graphs are indicative: performance in real life applications may vary. The data has been determined based on calculations for transmitters with a 2W ERP output power level.

SMARTRAC N.V. · Strawinskylaan 851 · 1077 XX Amsterdam · The Netherlands

Phone: +31 20 30 50 150 · Fax: +31 20 30 50 155

Contact: Sales & Customer Service

www.smartrac-group.com/contact

© 2018 SMARTRAC N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

info@smartrac-group.com





SENSOR PATCH

Moisture Level Sensing Inlay

SMARTRAC's state-of-the-art SENSOR PATCH broadens the company's inlay and tag product range for passive sensor inlays. It is specially designed to measure moisture conditions in medical care areas, e.g. geriatric care, long-term medical care and childcare.

The SMARTRAC SENSOR PATCH is a passive UHF inlay equipped with RFMicron's Magnus®S2 IC. This RFID sensor inlay offers great performance, and accurately detects urine levels in the diaper. The specific antenna design acts as a resistor/inductor/capacitor (RLC) tuned circuit to enable an antenna to sense its environment. The antenna converts environmental data into an impedance change, and then the sensor tag IC translates this into a sensor code, as it dynamically matches antenna impedance to die impedance. The sensing information is digitized and wirelessly communicated to off-the-shelf readers using a standard UHF Gen 2 protocol READ command for further processing by caregivers.

The innovative SENSOR PATCH is a disposable, UHF, single-chip sensor inlay solution that offers cost efficiency, is easy to implement, and works on different textiles, pulps and nonwoven materials. The inlay is attached outside of the diaper to avoid skin irritation. In industrial diaper production, the inlay can be placed between the diaper's layers to remain invisible to end users.

It is deployable where active or semi-active sensors are not practical, and involves no battery maintenance, costs or problems with product lifetime or recycling. Delivery formats are dry and wet to suit all converting-industry needs, and the inlay complies with all relevant industry standards and strict quality control parameters.

Overview

Operating Frequency
860 - 960 MHz (FCC)

Integrated Circuit (IC)
RFMicron Magnus®S2

Antenna Size
97 × 8.62 mm /
3.8 × 0.3 in

Die-cut Size
100 × 11.62 mm /
3.9 × 0.5 in

International Standards

▶ EPC Class 1 Gen 2
v.2.0.0 ISO 18000-6C



Application Areas

- ▶ Geriatric care
- ▶ Medical long-term care
- ▶ Childcare

SENSOR PATCH

Moisture Level Sensing Inlay

| Technical Features | | | |
|---|---|-----------------------------|---|
| IC + Memory RFMicron Magnus [®] S2 128 bit EPC + 144 bit user memory | Size 97 × 8.62 mm / 3.8 × 0.3 in 100 × 11.62 mm / 3.9 × 0.5 in | Format Dry Wet | Sales Code 3004236 3005045 |
| Frequency | 860-960 MHz (FCC band) | | |
| Antenna Size | 97 × 8.62 mm / 3.8 × 0.3 in | | |
| Die-Cut Size | 100 × 11.62 mm / 3.9 × 0.5 in | | |
| Web Width | 103 mm / 4.06 in | | |
| Operating Temperature | -40 °C to +85 °C / -40 °F to +185 °F | | |
| Adhesive | RA-2 | | |
| Qty/Reel | 500 pcs | | |
| Core Size | 76 mm / 3 in | | |
| Shelf Life | +20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing | | |

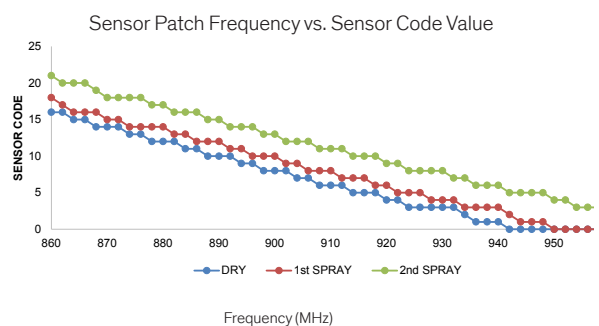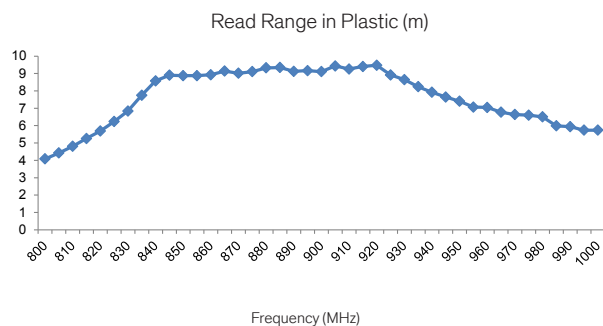

All the graphs are indicative; performance in real life applications may vary. The data has been determined based on calculations for transmitters with a 2W ERP output power level.

SMARTRAC N.V. · Strawinskylaan 851 · 1077 XX Amsterdam · The Netherlands

Phone: +31 20 30 50 150 · Fax: +31 20 30 50 155

Contact: Sales & Customer Service

www.smartrac-group.com/contact



© 2018 SMARTRAC N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

